


three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

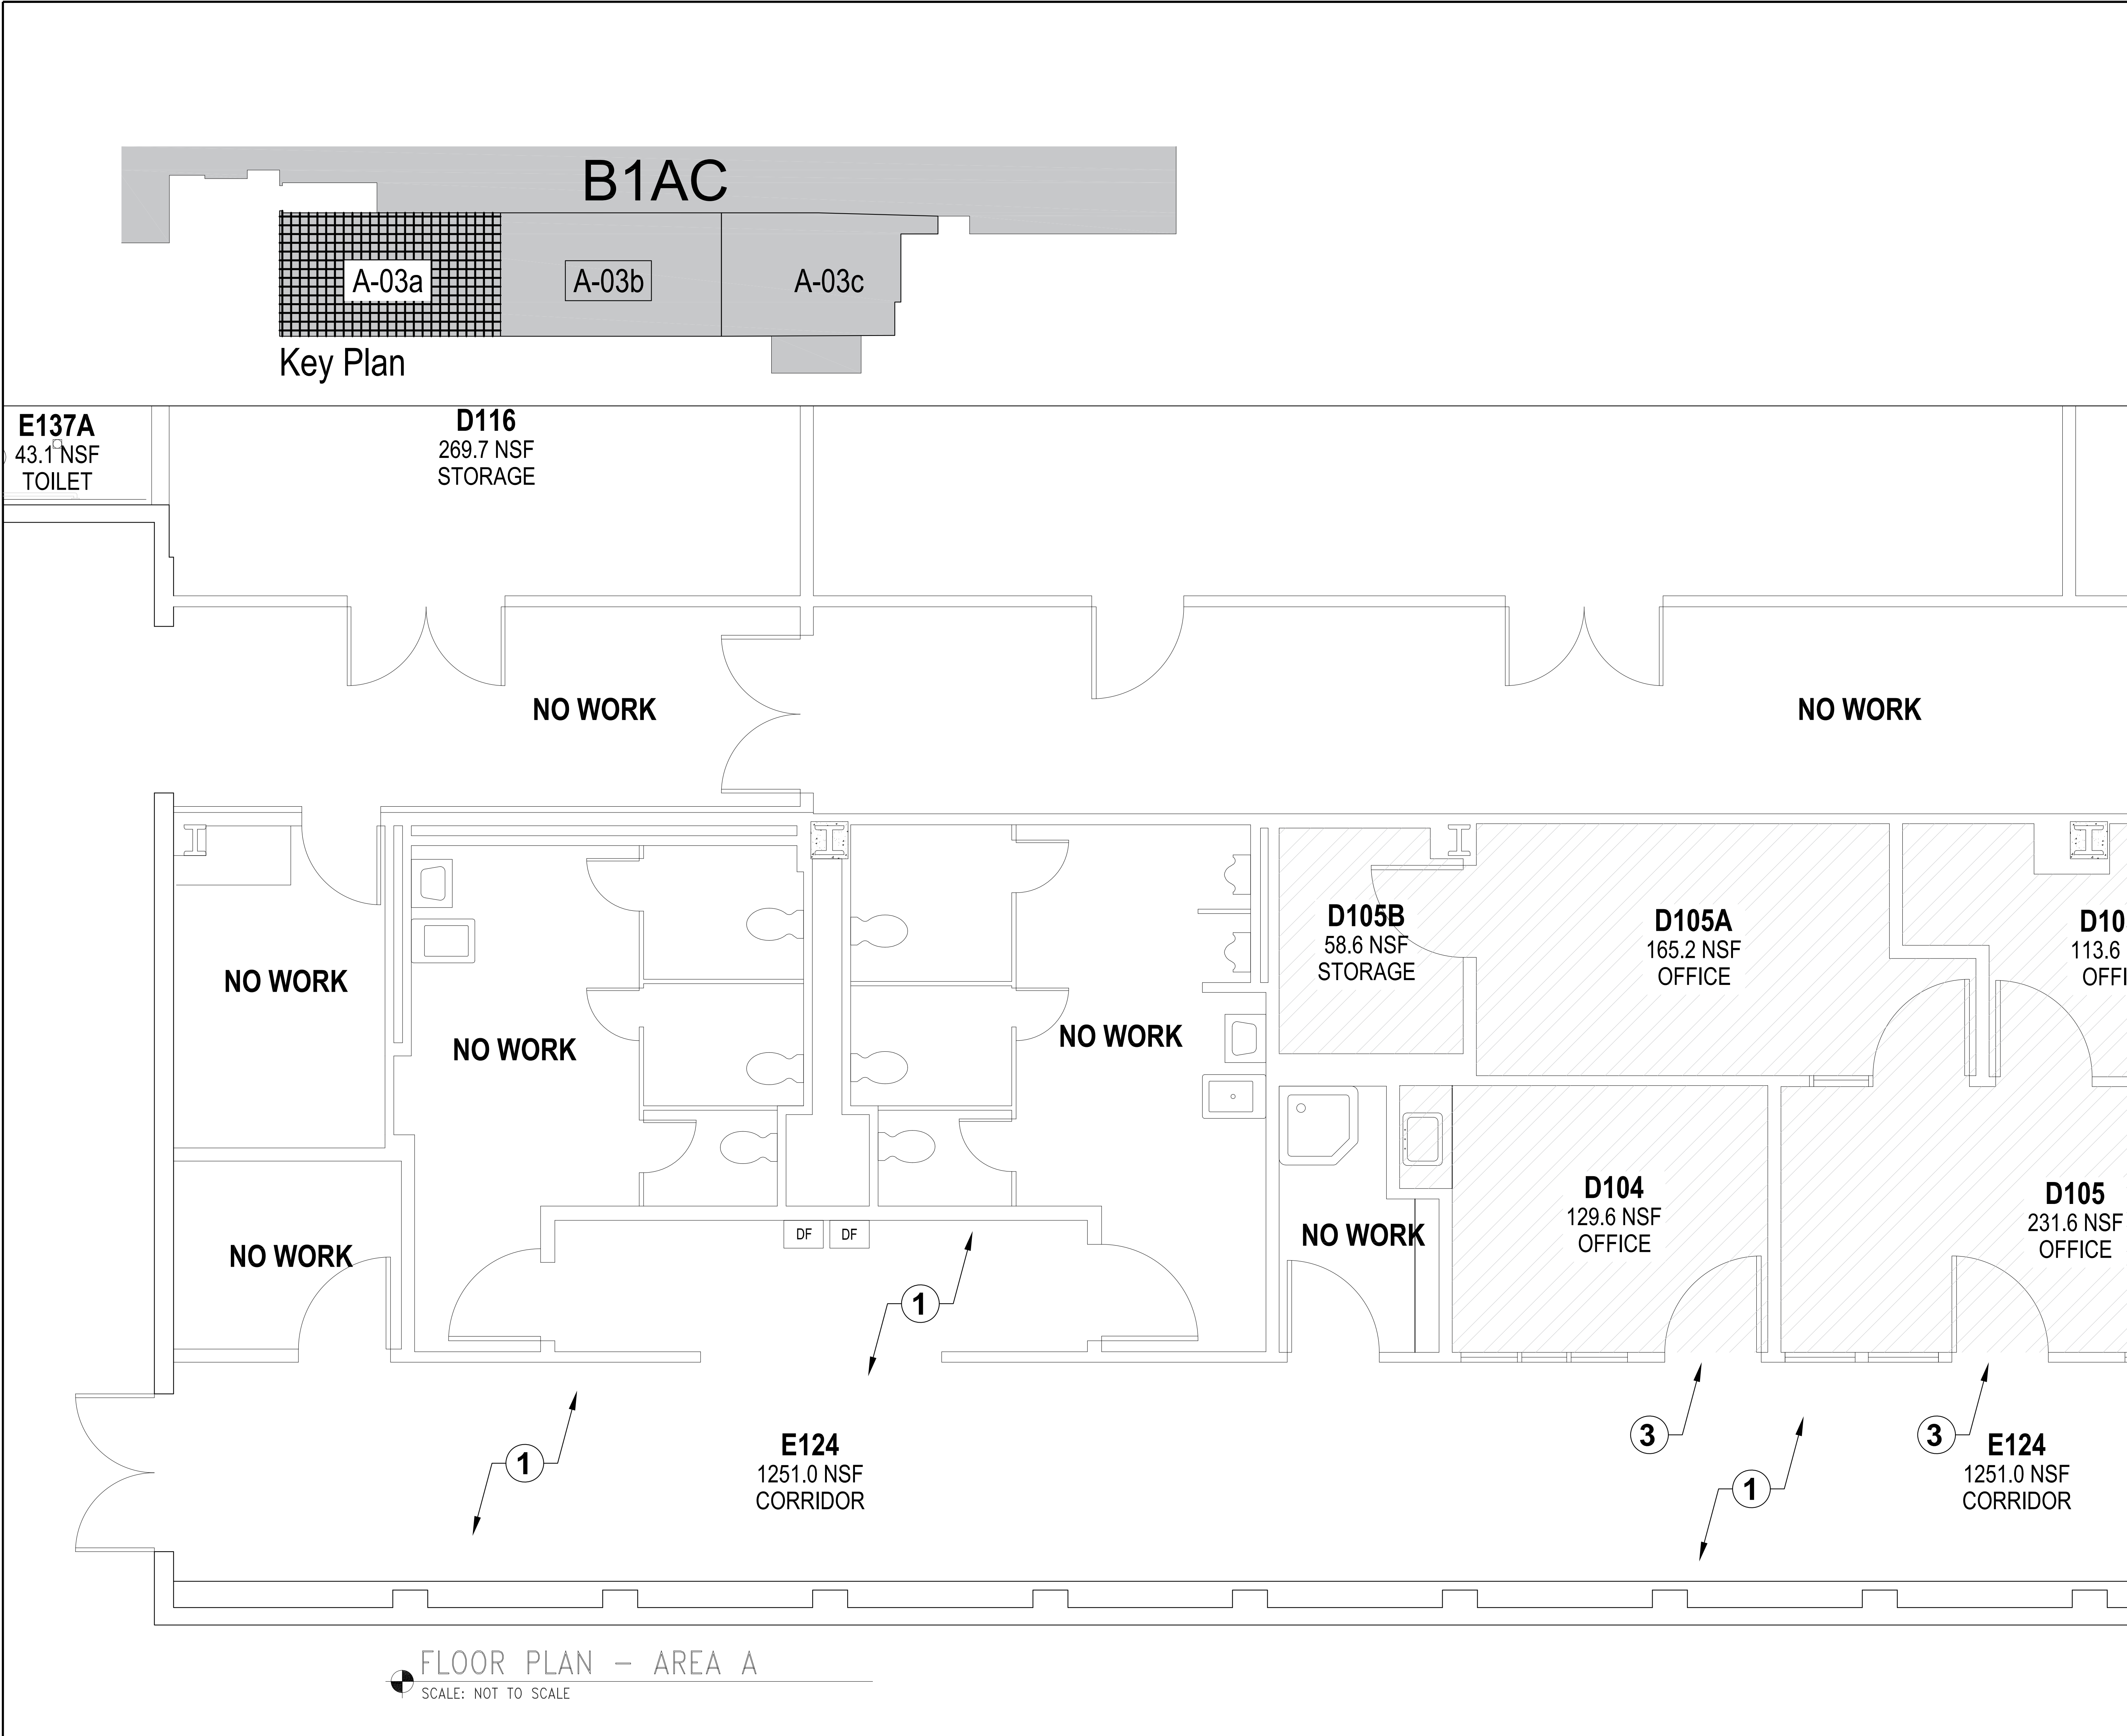


- GENERAL NOTES:
- THESE PLANS DELINEATE THE BASIC SCOPE OF WORK FOR THE REMOVAL OF EXISTING MATERIAL. THE DRAWINGS AND NOTES ARE PROVIDED WITH THE INTENT TO GENERALLY DESCRIBE AREAS AND LIMITS OF WORK. THE CONTRACTOR SHALL BE FAMILIAR WITH THE SITE AND CONDITIONS THERE ON; AND SHALL NOT RELY SOLELY ON REVIEW OF THE BIDDING DOCUMENTS IN DETERMINING THE EXTENT OF WORK REQUIRED. COORDINATION OF THESE DRAWINGS WITH REQUIREMENTS FOR CONTRACT WORK IS THE RESPONSIBILITY OF THE CONTRACTOR. DISCREPANCIES BETWEEN OR WITHIN THE CONTRACT DOCUMENTS SHALL BE REPORTED TO THE CONTRACTING OFFICER IMMEDIATELY. THE CONTRACTOR SHALL PROVIDE CLARITY SKETCHES, DIAGRAMS, AND FIELD DIMENSIONS OF EXISTING CONDITIONS AT THE REQUEST OF THE CONTRACTING OFFICER IF/WHEN CONFLICTS ARE IDENTIFIED.
 - REMOVE ALL PIPES, VALVES, CONTROLS, WIRES, AND CABLES AND APPURTENANCES WHICH SERVE DEVICES BEING REMOVED BACK TO THEIR SOURCE
 - CONTRACTOR SHALL REVIEW ALL CONTRACT DOCUMENTS AND COORDINATE FOR ALL CUTTING, PATCHING AND FINISH WORK.
 - IT IS THE CONTRACTORS RESPONSIBILITY TO FIELD VERIFY ALL EXISTING CONDITIONS.
 - CONTRACTOR TO PATCH AND CAULK ALL PENETRATIONS FROM DEMOLITION WORK WITHIN THE PROJECT SCOPE.
 - UNO, DISCONNECT AND REMOVE ALL EXISTING DEVICES, MAINTAIN CONTINUITY OF ALL REMAINING DEVICES AND EQUIPMENT. PROVIDE JUNCTION BOXES, CONDUIT AND WIRE TO EXTEND EXISTING CIRCUITS AS REQUIRED.
 - CONTRACTOR IS RESPONSIBLE FOR MOVING, REMOVING AND REINSTALLING ITEMS AGAINST AND ON WALLS.
 - NO PORTION OF THE WORK REQUIRING A SHOP DRAWING OR SAMPLE SUBMISSION SHALL BE COMMENCED UNTIL THE SUBMISSION HAS BEEN APPROVED BY THE OWNER'S REPRESENTATIVE. ALL SUCH PORTIONS OF THE WORK SHALL BE IN ACCORDANCE WITH APPROVED SHOP DRAWINGS AND SAMPLE.
 - THE AREA NEARBY THE CONSTRUCTION SITE WILL REMAIN IN OPERATION. COORDINATE WITH THE COR TO SCHEDULE THE WORK. DEMOLITION WORK, AND NOISY WORK MAY NEED TO BE DONE AFTER NORMAL BUSINESS HOURS. THE SAFETY OF THE PUBLIC MUST BE GUARDED CAREFULLY AT ALL PHASES OF CONSTRUCTION.
 - SPRINKLER SYSTEM TO REMAIN ACTIVE IN CONSTRUCTION AREA DURING CONSTRUCTION OR CONTRACTOR TO MEET NFPA 241 BY OTHER METHODS.
 - IT IS THE CONTRACTORS RESPONSIBILITY TO MOVE FURNITURE FROM OFFICES FOR WORK TO BE ACCOMPLISHED AND TO MOVE FURNITURE BACK AFTER WORK IS COMPLETE.
 - CONTRACTOR SHALL SUBMIT A PHASING PLAN TO BE APPROVED BY THE COR PRIOR TO STARTING WORK.
 - REFER TO SPECIFICATIONS AND A-05 FOR ROOM FINISH SCHEDULE.

KEYED NOTES

- NO NEW FLOORING IN E124 - CORRIDOR. PROVIDE NEW RESILIENT BASE.
- PATTERN MATCH FLOORING AT NEW/EXISTING FLOORING TRANSITION.
- FLOORING SEAM SHALL LAND IN THE MIDDLE OF THE DOOR IN THE CLOSED POSITION.

Legend

	PROVIDE NEW FLOORING AND BASE IN THESE LOCATIONS. SEE A05 AND SPECIFICATIONS FOR FINISH SCHEDULE.
--	---

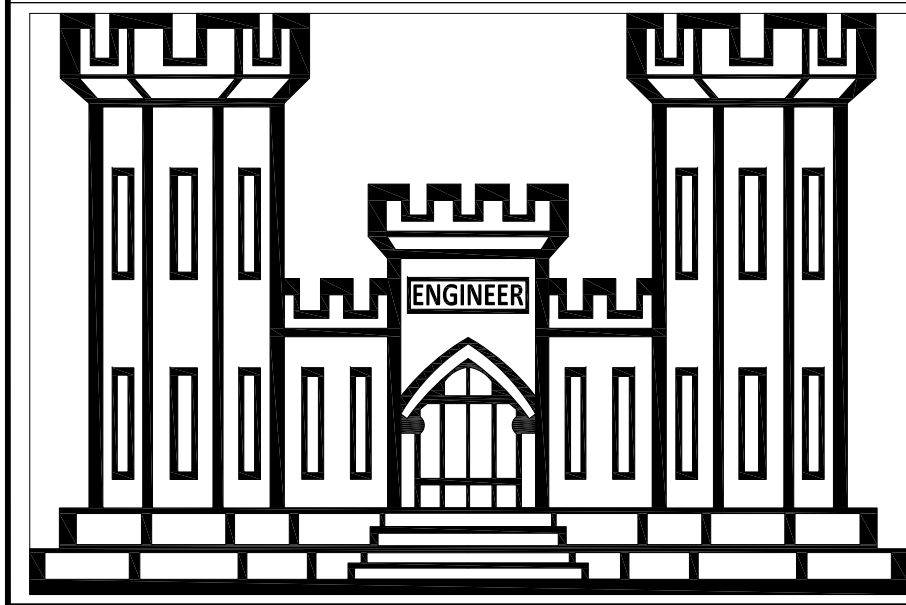	V.A. ROSEBURG HEALTHCARE SYSTEM VA VISN20	U.S. DEPARTMENT OF VETERANS AFFAIRS VA ROSEBURG HEALTHCARE SYSTEM 913 NW GARDEN VALLEY BLVD. ROSEBURG, OR. 97471 (541) 440-1000	PROFESSIONAL SEAL	BUILDING NAME: AM. CARE CLINIC - "D-WING"		PROJECT TITLE: REPLACE FINISHES B1AC "D-WING"				DRAWING TITLE: FLOOR PLAN AREA A		PROJECT NO: 653-24-103		OFFICE OF FACILITIES
				DRAWING SCALE: SCALE: NTS	LOCATION: ROSEBURG, OR	DESIGNED: MWR	CHECKED: -	REVIEWED: -	DRAFTED: MWR	BUILDING NO: 1AC	FLOOR NO: 1	SHEET NO: A-03a	DATE: 5/18/2023	